




## **FLAT BED, 40 TON**

40FB552051

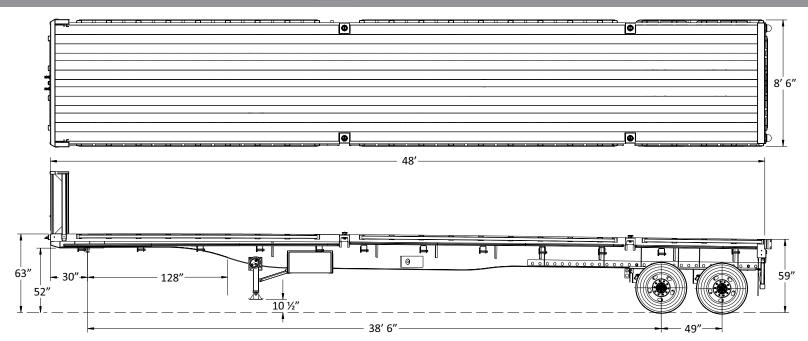

## **Trailer Model: GTFF402-48**

Overall Length	Overall Width	5th Wheel Height	Front Deck Height	Rear Deck Height	<b>Ground Clearance</b>	
48'	8′ 6″	52" (Unloaded)	63" (Nominal)	59" (Nominal)	10 ½"	

48'		8′ 6″	52" (Unloaded)	63"		
Main Deck						
Main Beam 1		100 KSI flanges and webs.				
Centers 44		44" Standard				
Side Rails 6'		6" Channel				
Crossmembers 4"		4" Jr. I-Beams				
Spacing 1		12"				
Stake Pockets 24" center, both sides, 5 front & rear, with rubrails.						
Decking/Flooring						
Main Decking	Main Decking 1 %" Apitong 2 Fasteners per Board					
Electrical						
Lights	LE	D Plus 2 - Rear Stro	bes			
Connector 7		7 Way SAE Connector				
Tires & Rims						
Tires	11	R x 22.5 "H"				
Rims	8.2	25 x 22.5 10 Hole H	ub Piloted Steel			
	Options					
Wide Turn Indicators						
Head Rack, Hub	lead Rack, Hubometer, Tool Box					
Web Winches 1	Web Winches 12 with straps driver side					
2 Twist Locks each Side for 20' Container, Rear Impact Guard, Rear Bumper				d,		

Axies, Juspension, & Rulling Gear			
# of Axles	2		
Axle Spacing	49"		
Axle Capacity	25,000lbs		
Brakes	16 ½" x 7" - 25K		
ABS	2S1M		
Axle 1	Fixed Type 30/30 ABS		
Axle 2	Fixed Type 30/30		
Air Ride Sliding Suspension (28' Tuck Axle)			
2-Speed Landing Gear			
King P	King Pin and Swing Clearance		
King Pin Style	Fixed		
King Pin Setting	30"		
Swing Clearance	128"		
5th Wheel Height	52"		
King Pin	2" Heavy Duty		
Finish			
Sandblast & Powder Coat			
Mud Flaps & Reflective Tape			
Dealer:			

Axles, Suspension, & Running Gear