



DROP DECK, 60 TON
60DP247730



PRD: 00337340 A.1



DROP DECK, 60 TON
3 AXLE, MAXIMUM PAYLOAD 120,000 LBS



HIGH QUALITY STEEL

NuStrength™
HIGH PERFORMANCE STEEL

NuStrength™ HR100

HIGH PERFORMANCE STEEL

ULTRA HIGH STRENGTH SHEET
100 KSI / 700 MPA SHEET STEEL COMPARISON

Melted and Manufactured in the USA

Constructed with T-1 100K PSI yield strength Steel. The High Tensile Steel ensures the designed camber is retained, and allows for a longer product service life.

STEMCO WHEEL WARRANTY



5 year wheel end warranty. Guardian wheel seals, Pro-Torq spindle nuts and Sentinel hub caps.

COLOR OPTIONS




Globe Trailers can powder coat to the color of your choice

STANDARD OUTRIGGERS



Standard removable outriggers.

12" CROSS MEMBER SPACING

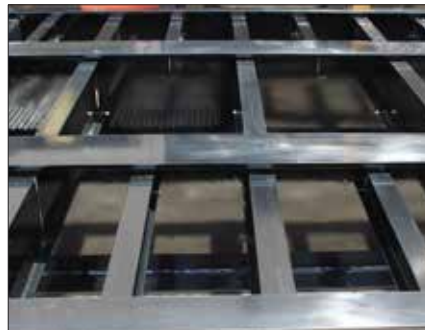

Standard 12" stubbed cross member spacing produces added strength to the trailer and also less stress on the decking, leading to a longer life of the decking material.

LANDING GEAR



2 speed Landing Gear, allows for 160,000 lbs static load.

WHEEL OPTIONS



All Globe trailers come with standard HUB piloted disc wheels. Wheels are also available in all Aluminum or Outer Aluminum.

DECKING OPTIONS



Oak: Standard.
Apitong: Best strength to weight ratios of natural woods.
Rumber: Composite which is impervious to fluids, mud, oil and UV rays.

LIGHTING SYSTEM



All Lighting is LED and mounted in rubber grommets to DOT standards.

AIR BAGS



30,000 pound rated large diameter air bags are standard. This allows for lower operating pressure and higher capacity when needed.

COLOR CODED HOSES



Color coded air hoses allow for easy trouble shooting and maintenance.


POLYURETHANE VS RUBBER BUSHING



Reduced Maintenance	Increased Maintenance
Increased Trailer Lifetime	Needs Replacement
Increased Trailer Performance	Reduces Trailer Performance
Weather Resistant	Damaged from Weather



All Globe Trailers are 100% powder coat finished. The entire process takes place at Globe's manufacturing facility. This eliminates the possibility of contamination occurring in transit between process phases. The process starts with sandblasting the trailer to near white, preheating the trailer steel in a dedicated, gas fired oven to optimum bonding temperature and applying an electrostatically charged zinc rich primer. The trailer then goes back in the oven to allow the primer to bond. After the primer has bonded, a top coat chosen from one of Globe Trailers' 188 color options is applied before once more going back in the oven to cure. The result is a durable, easily cleaned finish that protects the trailer from corrosion and ensures a long service life.

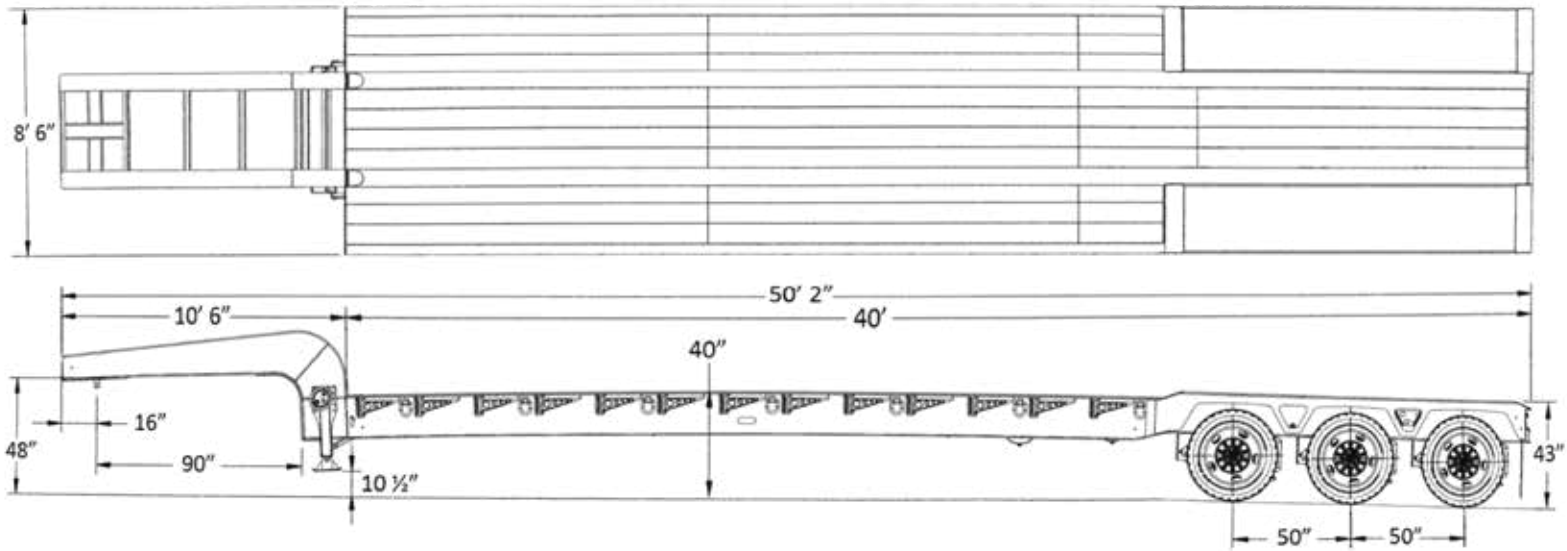

Trailer Model: GTFV603-51-40

Weight: Apx. _____ ± lbs

Overall Length	Overall Width	Gooseneck Length	Lower Deck Length	Lower Deck Height	Rear Deck Height	Ground Clearance
50' 2"	8' 6"	10' 6"	40'	40"	43"	23"

Main Deck	
Main Beam	100 KSI flanges and webs.
Centers	40" Standard
Side Rails	Structural Steel Channel
Crossmembers	10" & 4"
Spacing	12"
D-Rings	8 Per Side
Outriggers	11 Per Side
Decking/Flooring	
Main Decking	2" Oak
Wheel Covers	1/4" Solid Diamond Plate
Well Decking	Open
Electrical	
Lights	LED Plus 2 - Rear Stobes
Connector	7 Way Connector
Tires & Rims	
Tires	275/70R x 22.5 "H"
Rims	8.25 x 22.5 Hub Piloted Steel
Finish	
Sandblast & Powder Coat	
Mud Flaps & Reflective Tape	
Flag Holders	

Axles, Suspension, & Running Gear	
# of Axles	3
Axle Spacing	50"
Axle Capacity	25,000lbs
Brakes	16 1/2" x 7" - 25K
ABS	2S1M
Axle 1	Fixed Type 30/30
Axle 2	Fixed Type 30/30
Axle 2	Fixed Type 30/30 ABS
Adjustable Air Ride Suspension with Manual Dump	
2-Speed Landing Gear	
Gooseneck	
King Pin Style	Fixed
King Pin Setting	16"
Swing Clearance	90"
5th Wheel Height	48"
King Pin	2" Heavy Duty

Dealer: