



DLA Contract
SPE8EC-D-13-0022



GSA Contract
GS-30F-0027R



TAG-A-LONG, 20 TON

20TA141203



TAG-A-LONG, 20 TON

2 AXLE, MAXIMUM PAYLOAD 40,000 LBS



HIGH QUALITY STEEL

NuSTRENGTH™
HIGH PERFORMANCE STEEL

NuStrength™ HR100

HIGH PERFORMANCE STEEL

ULTRA HIGH STRENGTH SHEET
100 KSI / 700 MPA SHEET STEEL COMPARISON

Melted and Manufactured in the USA

Constructed with T-1 100K PSI yield strength Steel. The High Tensile Steel ensures the designed camber is retained, and allows for a longer product service life.

RAMPS



Adjustable with spring assist and safety bar.

HYDRAULIC RAMPS



Hydraulic ramp upgrade available for easier use.

WHEEL OPTIONS



All Globe trailers come with standard HUB piloted disc wheels. Wheels are also available in all Aluminum or Outer Aluminum.

DECKING OPTIONS



Oak: Standard.
Aptitong: Best strength to weight ratios of natural woods.
Rumber: Composite which is impervious to fluids, mud, oil and UV rays.

HEAVY DUTY PINTLE EYE



3" Pintle eye, with 4 adjustable height positions, with 2 heavy duty safety chains and grab hooks.

TIE DOWNS



D-rings on each side of the deck make it easier to secure loads to the trailer.

LANDING GEAR



2 speed Landing Gear, allows for 160,000 lbs static load.

SUSPENSION



Heavy duty tandem-axle spring ride suspension.

LIGHTING SYSTEM



All Lighting is LED and mounted in rubber grommets to DOT standards.

TOOL BOX



Lockable tool box with anti theft provisions available.

COLOR CODED HOSES



Color coded air hoses allow for easy trouble shooting and maintenance.

AXLES



25,000 lbs capacity axles.

COLOR OPTIONS



Globe Trailers can powder coat to the color of your choice.

STEMCO WHEEL WARRANTY



5 year wheel end warranty. Guardian wheel seals, Pro-Torq spindle nuts and Sentinel hub caps.


POLYURETHANE VS RUBBER BUSHING



| | |
|-------------------------------|-----------------------------|
| Reduced Maintenance | Increased Maintenance |
| Increased Trailer Lifetime | Needs Replacement |
| Increased Trailer Performance | Reduces Trailer Performance |
| Weather Resistant | Damaged from Weather |



All Globe Trailers are 100% powder coat finished. The entire process takes place at Globe's manufacturing facility. This eliminates the possibility of contamination occurring in transit between process phases. The process starts with sandblasting the trailer to near white, preheating the trailer steel in a dedicated, gas fired oven to optimum bonding temperature and applying an electrostatically charged zinc rich primer. The trailer then goes back in the oven to allow the primer to bond. After the primer has bonded, a top coat chosen from one of Globe Trailers' 188 color options is applied before once more going back in the oven to cure. The result is a durable, easily cleaned finish that protects the trailer from corrosion and ensures a long service life.

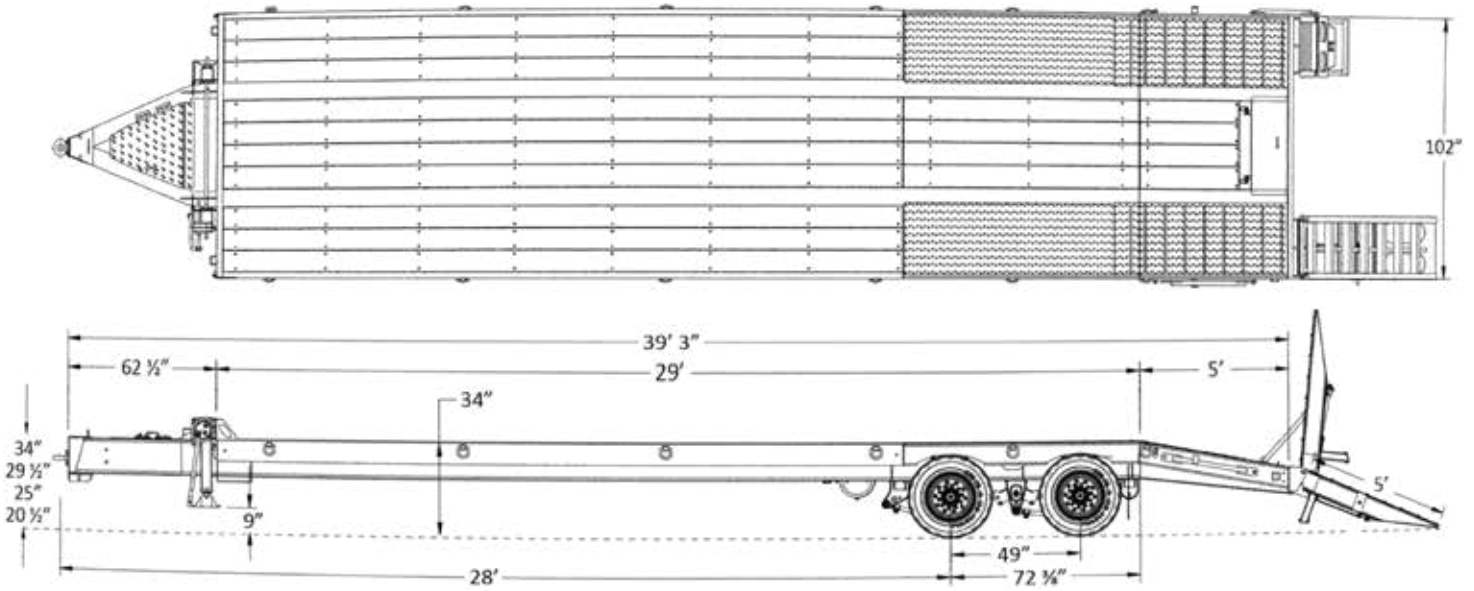

Trailer Model: GTTU202-37-24

Weight: Apx. 10,150 ± lbs

| Overall Length | Overall Width | Deck Length | Deck Height | Beavertail Length | Drawbar Length |
|----------------|---------------|-------------|-------------|-------------------|----------------|
| 34' 2" (410") | 8' 6" (102") | 24' TA | 34" | 60" | 62" |

| Frame | |
|--------------------------|----------------------------------|
| Main Beam | 14 x 6.75 @ 30# |
| Main Beam Centers | 39" |
| Side Rails | 8" Channel |
| Crossmembers | 4" IB |
| Spacing | 12" |
| Bumper | 10" Channel |
| Header | 8" Channel |
| # of D-Rings | 6 Ea Side |
| Drawbar | |
| Tool Box | Lockable w/ Steel Grating |
| Hitch Type | 3" Pintle Hitch |
| Safety Chains with Hooks | |
| Beavertail & Ramps | |
| Beavertail 60" | |
| Rear Ramps 24 x 60 | |
| Hydraulic | |
| Cleated | |
| Electrical | |
| Lights | LED S/T/T Only |
| Connector | 7 Way Connector |
| Decking/Flooring | |
| Main Decking | 1.75", Oak Full Width |
| Beavertail Flooring | Steel Covered S-Plate w/Grousers |

| Axles, Suspension, & Running Gear | |
|---|---------------------------------|
| # of Axles | 2 |
| Axle Spacing | 49" |
| Axle Capacity | 25,000 lbs |
| Brakes | 12 1/4" x 7 1/2" - 25K |
| ABS | 2S1M |
| Axle 1 | Fixed Type 30/30 Non-ABS |
| Axle 2 | Fixed Type 30/30 ABS |
| Suspension | Spring Ride 25K |
| Landing Gear | Dual 2-Speed 50K Drop Leg Jacks |
| Tires & Rims | |
| Tires | 235/75R x 17.5 "H" |
| Rims | 6.75 X 17.5 Hub Piloted Steel |
| Finish | |
| SandBlasted and Powder Coat (Color of Choice) | |
| Mud Flaps & Reflective Tape | |
| Flag Holders | |

Dealer: