




FLAT BED, 40 TON

40FB552051

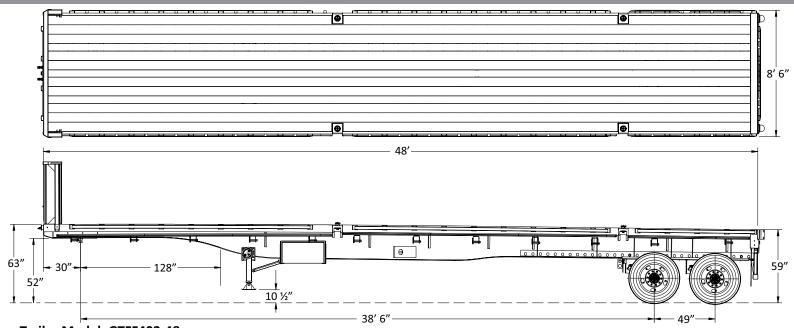

Weight: Apx.	: 17490 ± lbs
Trailer Model	: G1FF402-48

Overall Length	Overall Width	5th Wheel Height	Front Deck Height	Rear Deck Height	Ground Clearance
48'	8′ 6″	52" (Unloaded)	63" (Nominal)	59" (Nominal)	10 ½"

48	8 0	52 (Unioaded)	0.5
Main Deck			
Main Beam	100 KSI flanges and webs.		
Centers	44" Standard		
Side Rails	6" Channel		
Crossmembers	4" Jr. I-Beams		
Spacing	12"		
Stake Pockets	ckets 24" center, both sides, 5 front & rear, with rubrails.		
Decking/Flooring			
Main Decking	1 ¾" Apitong 2 Fasten	iers per Board	
Electrical			
Lights	LED Plus 2 - Rear Stro	bes	
Connector	7 Way SAE Connector		
Tires & Rims			
Tires	11R x 22.5 "H"		
Rims	8.25 x 22.5 10 Hole H	ub Piloted Steel	
Options			
Wide Turn Indicators			
Head Rack, Hub	Head Rack, Hubometer, Tool Box		
Web Winches 1	Neb Winches 12 with straps driver side		
2 Twist Locks each Side for 20' Container, Rear Impact Guard, Rear Bumper			

Axles, Suspension, & Running Gear			
# of Axles	2		
Axle Spacing	49"		
Axle Capacity	25,000lbs		
Brakes	16 ½" x 7" - 25K		
ABS	2S1M		
Axle 1	Fixed Type 30/30 ABS		
Axle 2 Fixed Type 30/30			
Air Ride Sliding Suspension (28' Tuck Axle)			
2-Speed Landing Gear			
King Pin and Swing Clearance			
King Pin Style	Fixed		
King Pin Setting	30"		
Swing Clearance	128"		
5th Wheel Height	52"		
King Pin	2" Heavy Duty		
Finish			
Sandblast & Powder Coat			
Mud Flaps & Reflective Tape			

Dealer: