

Trailer Model: GTFV403-40-27

Weight: Apx. 40,000 ± lbs

Overall Length	Overall Width	Gooseneck Length	Lower Deck Length	Lower Deck Height	Ground Clearance
40'	8' 6"	11' 3"	25'	36"	13 ½"

Main Deck	
Main Beam	16" Fabricated I-Beam
Centers	36" Standard
Side Rails	16" Fabricated I-Beam
Crossmembers	10" & 4"
Spacing	12"
Outriggers	Removable Standard
# Of D-Rings	12 Each side
Concentrated Load	80,000 lbs
Dual toolboxes in top deck similar to interstate design	
Decking/Flooring	
Main Decking	2" Apitong
Wheel Covers	Steel Covered D-Plate
Electrical	
Lights	LED Plus 2 - Rear Strobes
Connector	7 Way SAE Connector
Tires & Rims	
Tires	Sumitomo ST 727 10R17.5 "H"
Rims	6.75 X 17.5 Hub Piloted Steel
Beavertail & Ramps	
Beavertail 48"	
Toolbox in beaver tail	

Axles, Suspension, & Running Gear	
# of Axles	3
Axle Spacing	49"
Axle Capacity	25,000lbs
Brakes	16 ½" x 7" - 25K
ABS	4S2M
Axle 1	Fixed Type 30/30 ABS
Axle 2	Fixed Type 30/30 ABS
Axle 2	Fixed Type 30/30 NON ABS
Spring Ride Suspension.	
2-Speed Landing Gear	
Gooseneck	
King Pin Style	Fixed
King Pin Setting	18"
Swing Clearance	86" & 93"
5th Wheel Height	50"
King Pin	2" Heavy Duty
Finish	
Sandblast & Powder Coat	
Mud Flaps & Reflective Tape	
Flag Holders	

Dealer:

HIGH QUALITY STEEL

NuStrength™
HIGH PERFORMANCE STEEL
NuStrength™ HR100

HIGH PERFORMANCE STEEL

ULTRA HIGH STRENGTH SHEET
100 KSI / 700 MPA SHEET STEEL COMPARISON

Melted and Manufactured in the USA

Constructed with T-1 100K PSI yield strength Steel. The High Tensile Steel ensures the designed camber is retained, and allows for a longer product service life.

WARRANTY



Globe Trailer's 10 year structural warranty on all lowboys is the best in the industry. Most competitors offer only a 5 year warranty. This shows how committed Globe Trailers is to it's customers.

STEMCO WHEEL WARRANTY



5 year wheel end warranty. Guardian wheel seals, Pro-Torq spindle nuts and Sentinel hub caps.

LANDING GEAR



2 speed Landing Gear, allows for 160,000 lbs static load.

SUSPENSION




Heavy Duty Tridem suspension.

COLOR OPTIONS



Globe Trailers can powder coat to the color of your choice

BEAVER TAIL

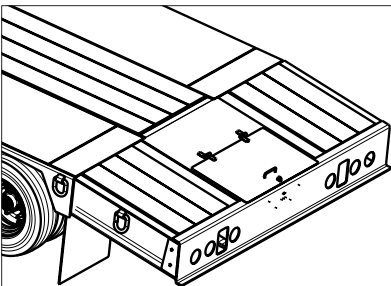

The Beavertail is an angled extension on the rear frame. This makes rear loading more convenient.

STANDARD OUTRIGGERS



Standard removable outriggers.

COLOR CODED HOSES



Color coded air hoses allow for easy trouble shooting and maintenance.

DECKING OPTIONS



Oak: Standard.

Apitong: Best strength to weight ratios of natural woods.

Rumber: Composite which is impervious to fluids, mud, oil and UV rays.

LIGHTING SYSTEM



All Lighting is LED and mounted in rubber grommets to DOT standards.

POLYURETHANE VS RUBBER BUSHING



Reduced Maintenance	Increased Maintenance
Increased Trailer Lifetime	Needs Replacement
Increased Trailer Performance	Reduces Trailer Performance
Weather Resistant	Damaged from Weather



All Globe Trailers are 100% powder coat finished. The entire process takes place at Globe's manufacturing facility. This eliminates the possibility of contamination occurring in transit between process phases. The process starts with sandblasting the trailer to near white, preheating the trailer steel in a dedicated, gas fired oven to optimum bonding temperature and applying an electrostatically charged zinc rich primer. The trailer then goes back in the oven to allow the primer to bond. After the primer has bonded, a top coat chosen from one of Globe Trailers' 188 color options is applied before once more going back in the oven to cure. The result is a durable, easily cleaned finish that protects the trailer from corrosion and ensures a long service life.